



KAS PRE-CLEANER

CR ADAPTOR KIT

CR SERIES

INSTALLATION MANUAL

PRODUCT NUMBER: KAS-103

This kit is for OEM low mount air cleaner with these configurations:



Installed low mount KAS adaptor and KAS Pre-cleaner kit:



0 Safety

0.1 Instructions

0.1.1 IMPORTANT: Read through this instruction manual thoroughly and familiarize yourself with the KAS Pre-cleaner before installation of these components.

This instruction manual explains the proper procedure for installation of the KAS Pre-cleaner. Do not skip steps or perform them out of order.



0.2 Recognize Safety Information

0.2.1 This is a safety-alert symbol. When you see this symbol on your straw chopper or in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating practices.



0.3 Understand Signal Words

0.3.1 A signal word - DANGER, WARNING, or CAUTION - is used with the safety-alert symbol. DANGER identifies the most serious hazards.

WARNING or CAUTION safety signs are located near specific hazards or precautionary areas in this manual.



0.4 Work In Ventilated Area

0.4.1 Engine exhaust fumes can cause sickness or death. If it is necessary to run an engine in an enclosed area, remove the exhaust fumes from the area with an exhaust pipe extension.

If you do not have an exhaust pipe extension, open the doors and get outside air into the area.




0.5 Remove Key from Ignition

0.5.1 ALWAYS shut off machine engine prior to working on it.

Apply park brake, remove key and lock operators cab.

If the machine is equipped with an additional safety master power switch, turn this to the Power OFF position.

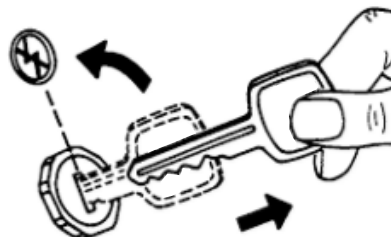

0.6 Block Wheels

0.6.1 Park the machine on level ground.

Always engage the park brake and block the wheels prior to working to prevent the machine from moving.



0.7 Practice Safe Maintenance

0.7.1 Understand service procedure before doing work. Keep area clean and dry.

Never lubricate, service, or adjust machine while it is moving. Keep hands, feet and clothing away from power-driven parts. Disengage all power and operate controls to relieve pressure. Lower equipment to the ground. Stop the engine. Remove the key. Allow machine to cool.

Securely support any machine elements that must be raised for service work.

Keep all parts in good condition and properly installed. Fix damage immediately. Replace worn or broken parts. Remove any buildup of grease, oil or debris.



0.8 Guards and Shields

0.8.1 Keep guards and shields in place at all times. Ensure that they are serviceable and maintained correctly.



0.9 Avoid Contact With Moving Parts

0.9.1 Keep hands, feet and clothing away from power driven parts. Never clean, lubricate or adjust machine when it is running.




0.10 Dispose of Waste Properly

0.10.1 Improperly disposing of waste can threaten the environment and ecology. Potentially harmful waste includes such items as oil, fuel, coolant, brake fluid, filters and batteries.

Use leakproof containers when draining fluids. Do not use food or beverage containers that may mislead someone into drinking from them.

Do not pour waste onto the ground, down a drain or into any water source.



0.11 Personal Protective Equipment (PPE)

0.11.1 A Qualified Person designated by the employer, who is knowledgeable about and familiar with all relevant specifications and assembly instructions and is capable of identifying existing or potential hazards in surroundings or working conditions which may be hazardous or dangerous to employees shall determine appropriate Personal Protective Equipment required for this assembly.

Personal Protective Equipment (PPE) are devices worn by the employees to protect against hazards in the environment. Examples include safety glasses, face shields, respirators, gloves, hard hats, steel-toe shoes, and hearing protection. Wear close fitting clothing and safety equipment appropriate for the job.

Operating equipment safely requires the full attention of the operator. Do not wear radio or music headphones while operating machine.




0.12 Prepare for Emergencies

0.12.1 Be prepared if a fire starts.

Keep a first aid kit and fire extinguisher handy.

Keep emergency numbers for doctors, ambulance service, hospital and fire department near your telephone.

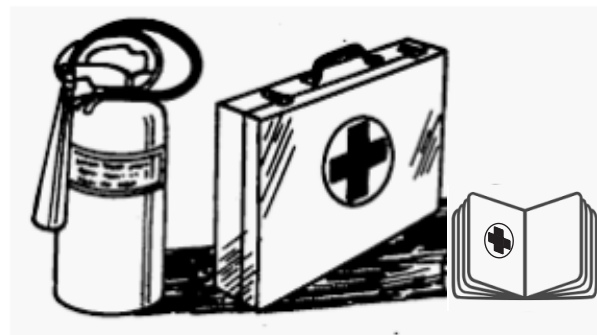

0.20 In the Event of Fire

0.20.1 Stop work immediately at first sign of fire. This may be the smell of smoke or the sight of smoke or flames. Get off the machine immediately and move away from the fire. Do not return to the machine or fire!



CAUTION: Avoid personal injury.
If a fire is too far advanced, do not try to extinguish it.
Call the fire department!
The number one priority is safety. Always put the safety of the operator and bystanders first.



If a fire can be safely extinguished, proceed carefully and follow these guidelines:

1. Remove fire extinguisher from bracket and carry it to the area of fire.
2. Approach area of fire with your back to the wind.
3. Pull the safety pin out of actuating lever.
4. Hold extinguisher upright, pointing nozzle away from you and aim hose at base of the flames.
5. Squeeze the lever slowly and evenly to discharge fire extinguisher.
6. Move extinguisher nozzle side to side to cover the source of the fire evenly with extinguishing agent.

0.14 Safety Decals

Pictorial Safety Signs

At several important places on this machine, safety signs are affixed intending to signify potential danger. The hazard is identified by a pictorial in a warning triangle. An adjacent pictorial provides information on how to avoid personal injury. These safety signs and a brief explanatory text follow.

Hand Injury / Rotate Danger **RP1089**

Risk of injury caused by rotating parts.



Caution / Check Service Manual **RP873**

This operator's manual contains all important information necessary for safe machine operation. Carefully observe all safety rules to avoid accidents.




1 KAS Pre-Cleaner Adaptor Kit Installation

KAS-103 Pre-Cleaner Adaptor Kit CR DOT Series

Parts List:

KA818B	Blockoff Mount Radiator (A)	Qty 1
KA819BA	Clamp 335 to 350mm (B)	Qty 1
KA814BA	Air Intake Housing (C)	Qty 1
KA817B	Top Intake Brace (D)	Qty 1
KA816B	Top Intake Mount Plate (E)	Qty 1
KA820B	Spacer (F)	Qty 1
KA815B	Air Intake Tube (G)	Qty 1
RP1578	Clamp T-Bolt M6 x 8.23 ID SS (H)	Qty 1
RP1561	Clamp U-Bolt - 8-1/8" ID (J)	Qty 1

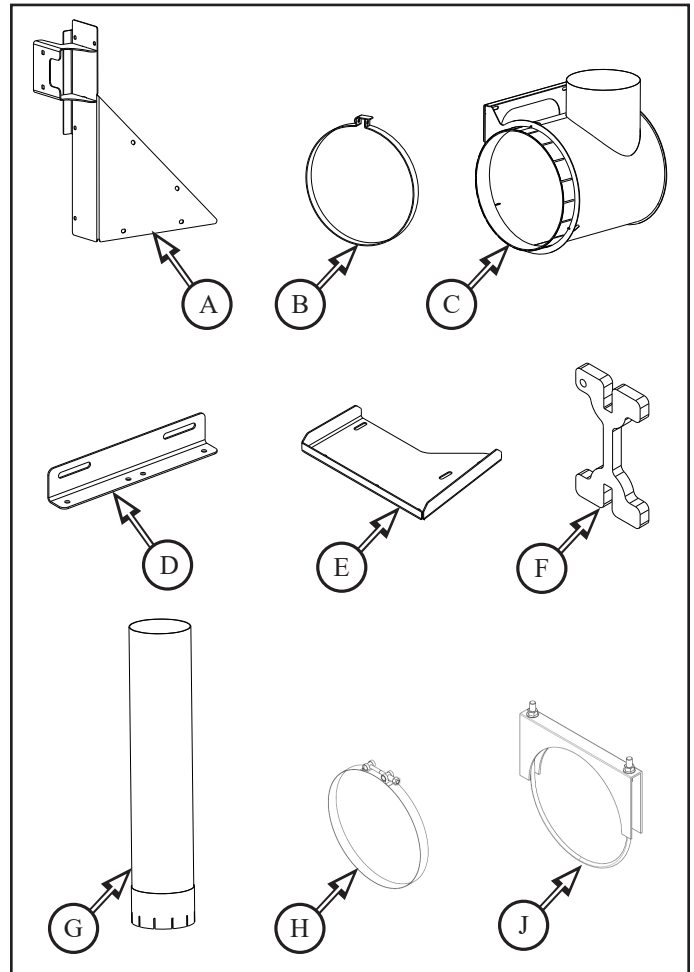




**** Ensure dust, dirt and chaff is blown away from work area ****

- 1.1** Remove OEM intake elbow (**K**) from radiator box (**L**)
- hardware (**K1**) to be reused

- 1.1.1** Remove OEM intake elbow (**K**) from OEM pre-cleaner (**M**)
- not to be reused
- hose clamp (**N**) not to be reused



WARNING ** Ensure no debris enters engine intake while transition chute is removed **

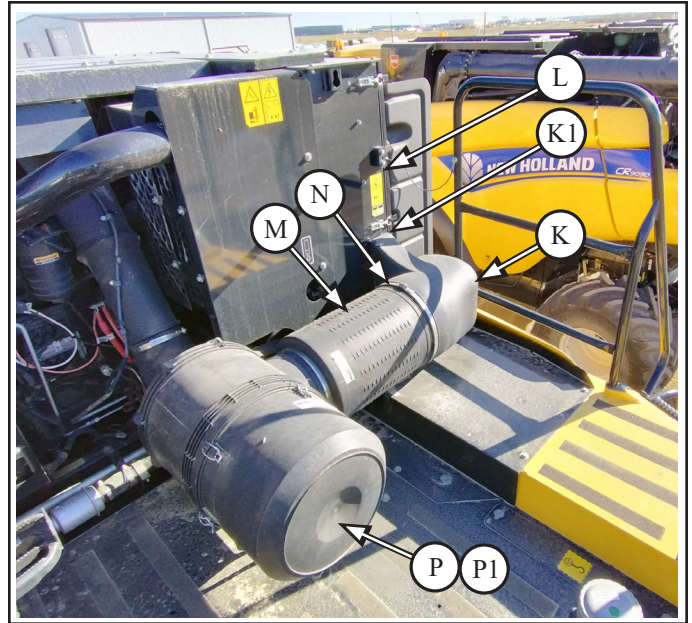


- 1.2** Clean surface of OEM pre-cleaner (**M**)
- ensure all tubes/openings (**M1**) are clear of debris and clean


1.3 Inspect and clean:



- air filter (**P**)
- interior of air filter housing (**P1**)
- interior of OEM pre-cleaner canister (**M**)
- scavenger port (**M2**)
- off bottom of OEM pre-cleaner canister

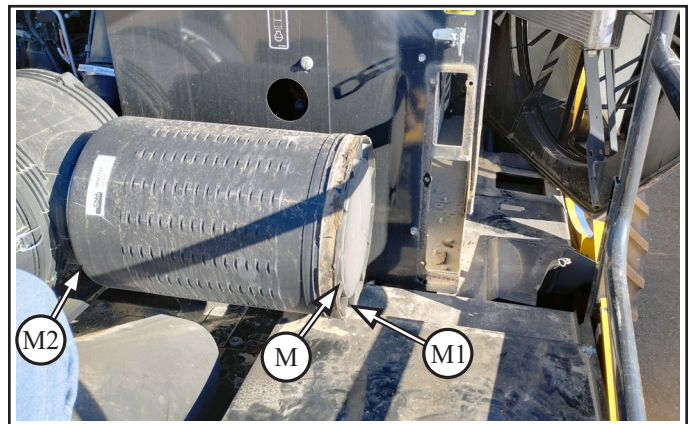


- 1.4** Remove OEM top plate mounting hardware (**L1**) x3 from radiator box (**L**)
- hardware (**L1**) to be reused

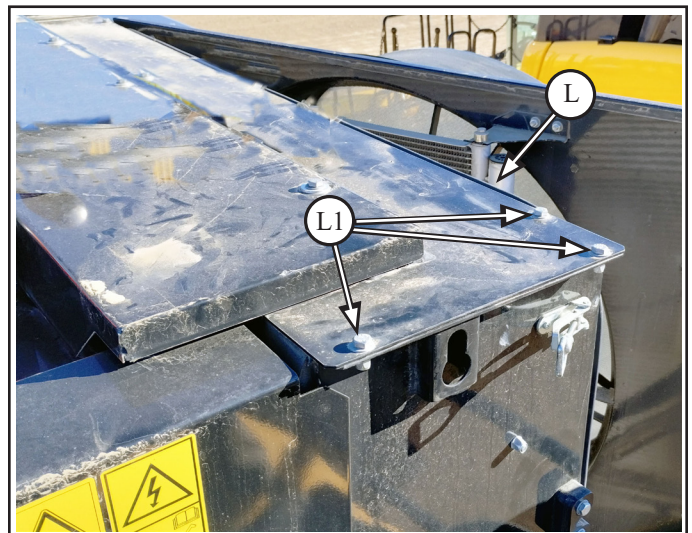


1.5 Install radiator block off plate (**A**) to lower corner radiator box (**L**), with:

- reuse M6 bolt hardware (**A1**) x8
- new M6 flange nut (**A1**) x8

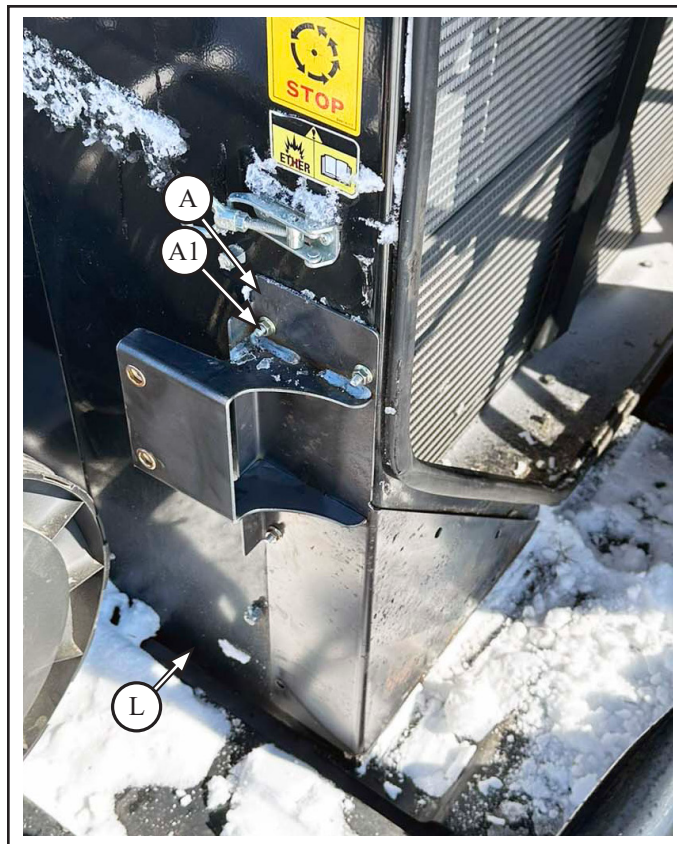

1.6 Slide clamp (**B**) onto air intake housing (**C**)
- do not tighten at this stage

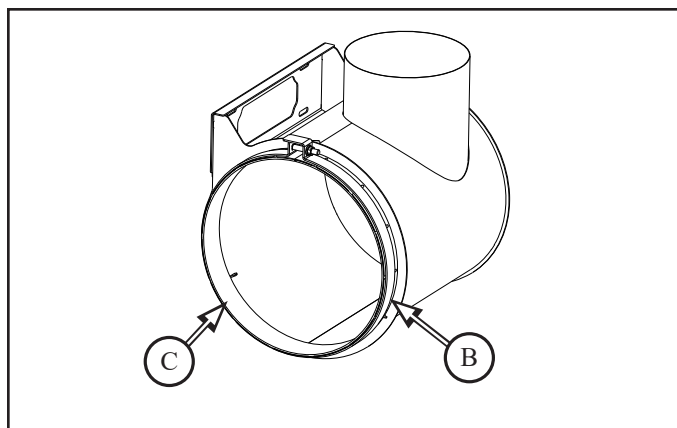


Air Intake Housing Installation for Long OEM Pre-Cleaner

1.7 Install air intake housing (C) onto long OEM pre-cleaner (ML)
- ensure it seats fully against stop

1.7.1 Secure air intake housing (C) to radiator block off plate (A), with:


- M8 x 25 round head bolt and flange nut (C1) x2
- head of bolt on backside of block off plate (A)
- ensure housing (C) is level before tightening bolts

1.7.2 Tighten clamp (B) securing air intake housing (C) onto OEM pre-cleaner (ML)

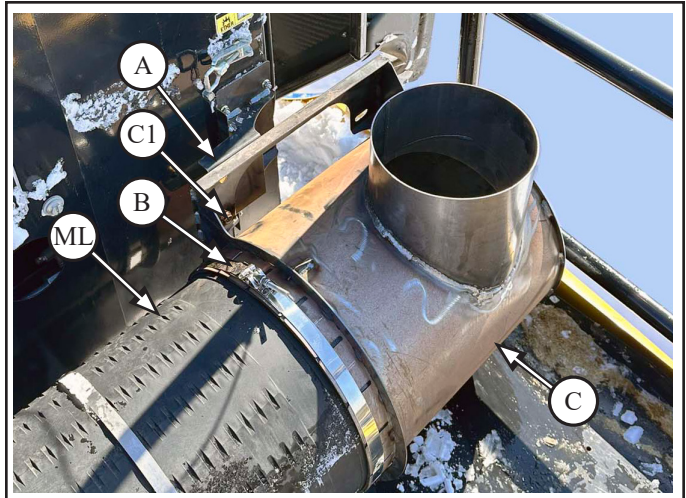

1.8 Install top mount brace (D) to underside of top mount plate (E) in position shown, with:

- M8 x 20 flange head bolt and flange nut (D1) x2

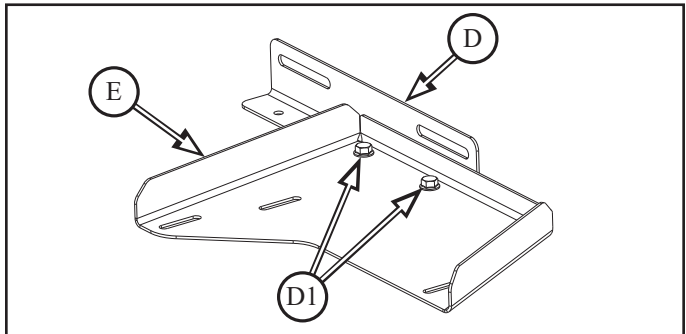


Air Intake Housing Installation for Short OEM Pre-Cleaner

1.9 Install air intake housing (C) onto short OEM pre-cleaner (MS)
- ensure it seats fully against stop

1.9.1 Secure air intake housing (C) to radiator block off plate (A) with spacer plate (F) in between, with:


- M8 x 25 round head bolt and flange nut (C1) x2
- head of bolt on backside of block off plate (A)
- ensure housing (C) is level before tightening bolts

1.9.2 Tighten clamp (B) securing air intake housing (C) onto OEM pre-cleaner (MS)

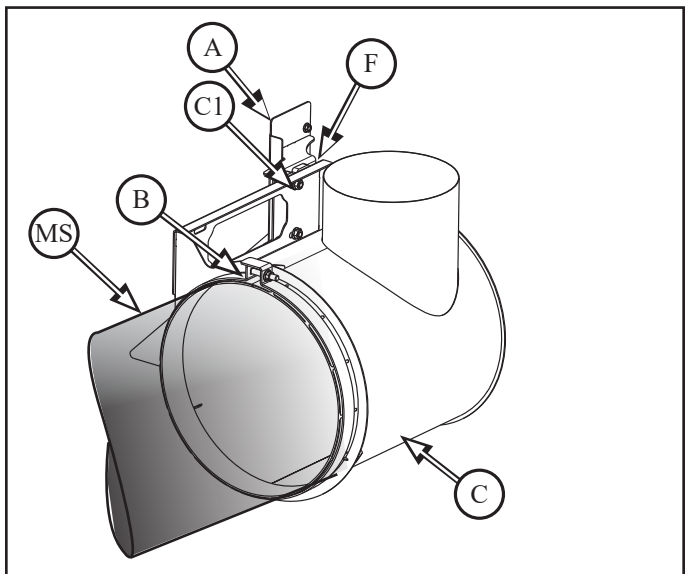

1.10 Install top mount brace (D) to underside of top mount plate (E) in position shown, with:


- M8 x 20 flange head bolt and flange nut (D1) x2

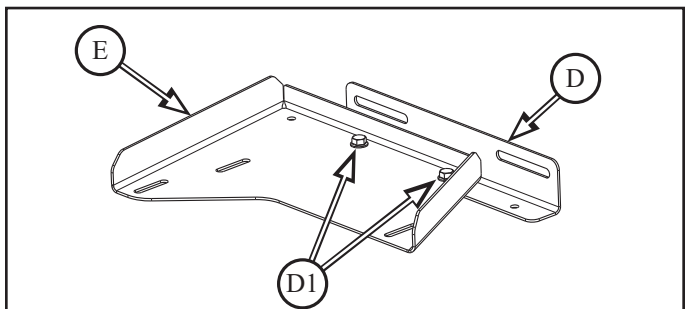

Common Installation

1.11 Install top mount plate (E) to top of radiator box (L), with:

- reuse hardware (L1) x3
- do not tighten at this stage

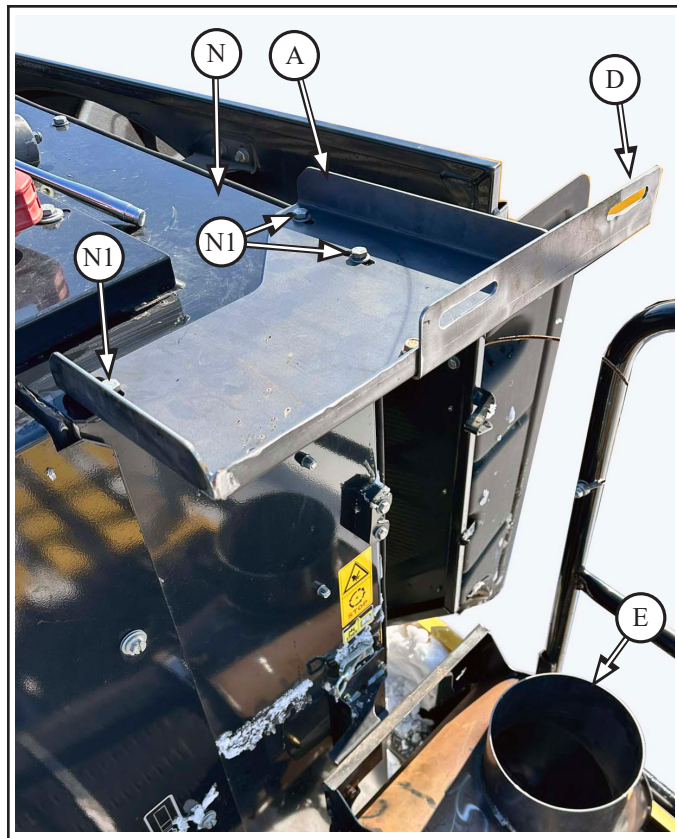

1.12 Install pipe extension (G) to air intake housing (C), with:


- hose clamp (H)

1.12.1 Secure pipe extension (F) to top mount brace (D), with:

- U-bolt Clamp (J)

1.12.2 Align pipe extension (G) so that it is straight and centered

1.12.3 Tighten all hardware

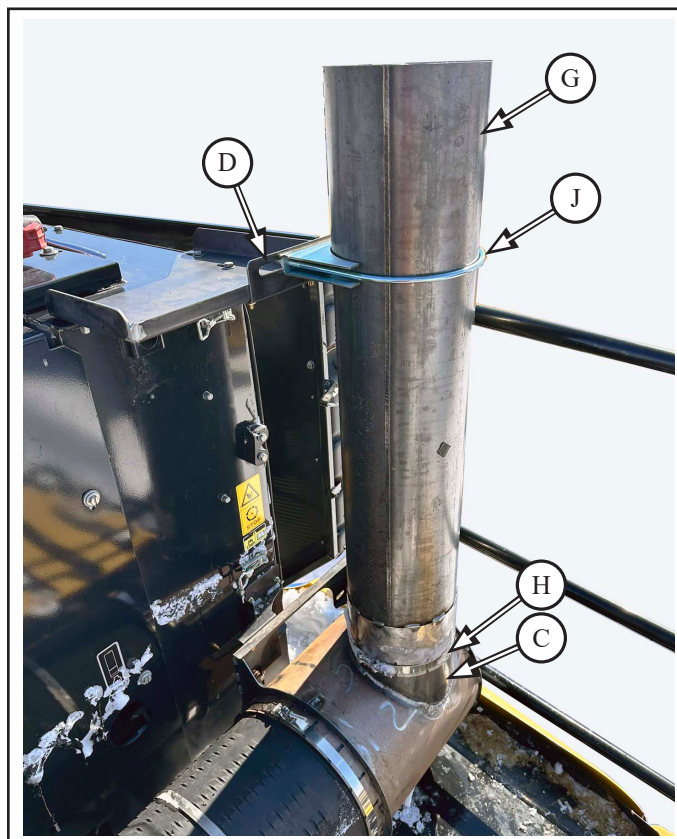


1.13 If equipped with the KAS Pre-Cleaner, see section 2 for complete installation

2 KAS Pre-Cleaner Installation

Parts List:


KA800A	KAS Pre-cleaner assembly 8in (A)	Qty 1
RP1535	Clamp T-Bolt Band 0.25 x 8.5 ID SS (B)	Qty 1

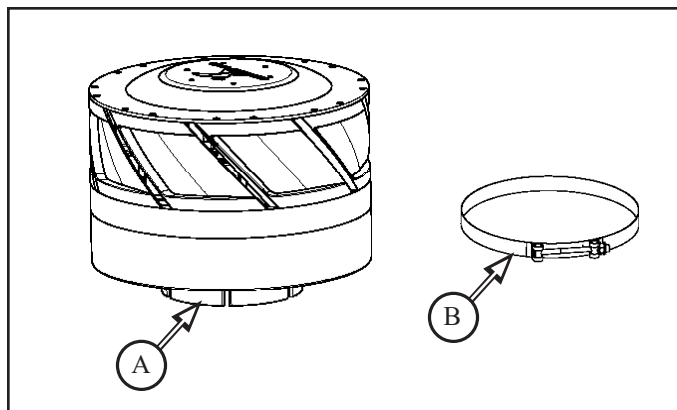

2.1 Install KAS Pre-cleaner assembly (A) on to intake tube (F), with:


- ensure it seats fully against stop
- hose clamp (B)

2.1.1 Torque to 20 N*m (15 lbs-ft)

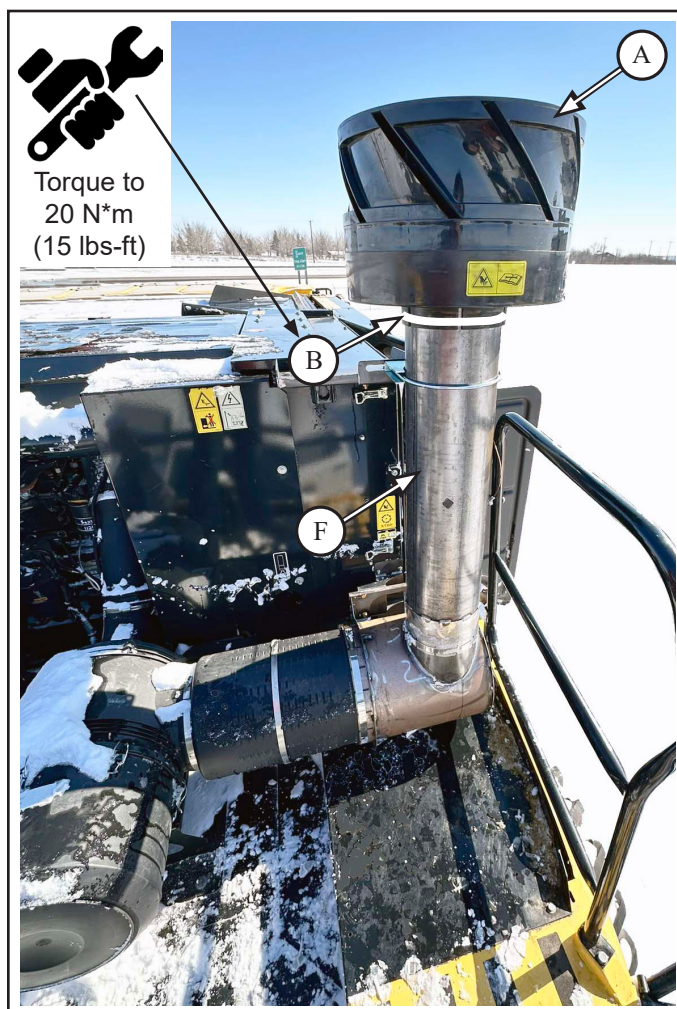



CAUTION: When the grain tank extensions and the auger are folded down, the KAS Pre-cleaner will be the tallest point on the combine

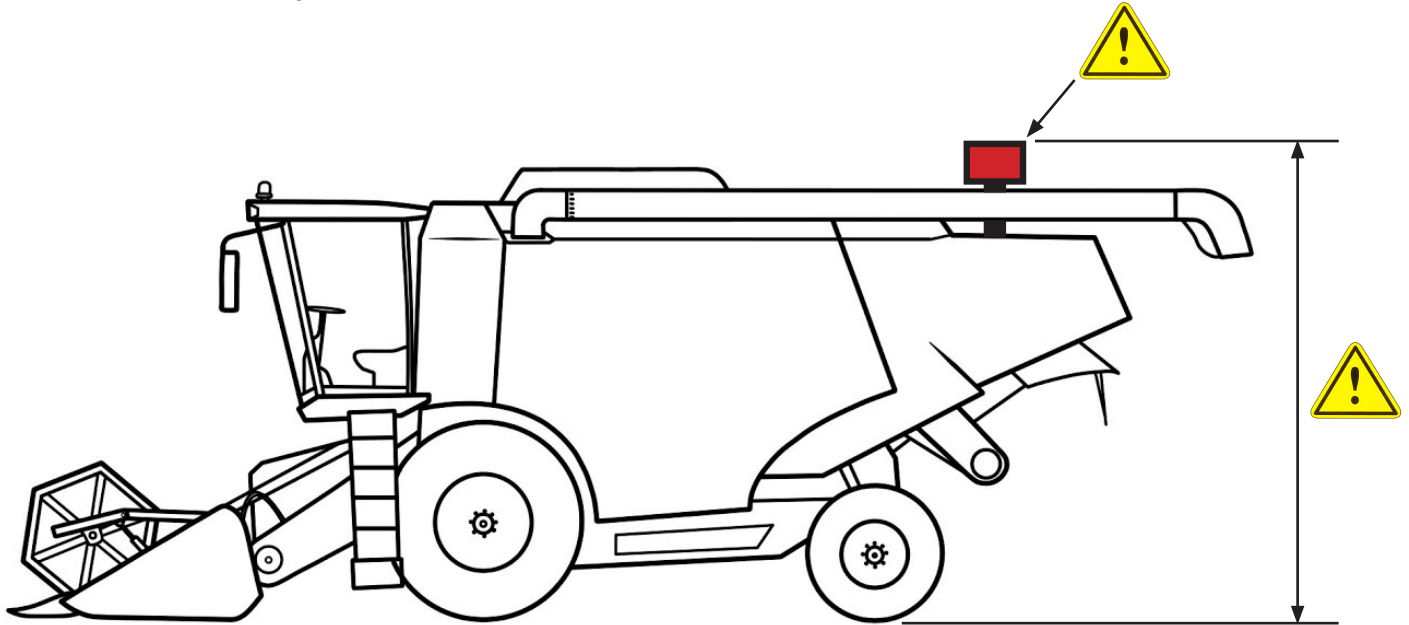

Torque Table		
Nominal Size	Class 8.8	Class 10.9
	Nm / (ft-lbs)	Nm / (ft-lbs)
M8 - flanged	27 / (20)	39 / (29)
- non flanged	25 / (18)	35 / (26)
M10 - flanged	54 / (40)	57 / (42)
- non flanged	49 / (36)	70 / (51)
M12 - flanged	93 / (69)	134 / (98)
- non flanged	85 / (63)	121 / (90)



Notes:

REDEKOP MANUFACTURING

1.866.REDEKOP (1.866.733.3567)

Saskatoon, Saskatchewan Canada S7K 3J7

info@redkopmfg.com

www.redkopmfg.com

REDEKOPTM

For additional and the most up to date Manuals:



EQR002

REDEKOPTM